


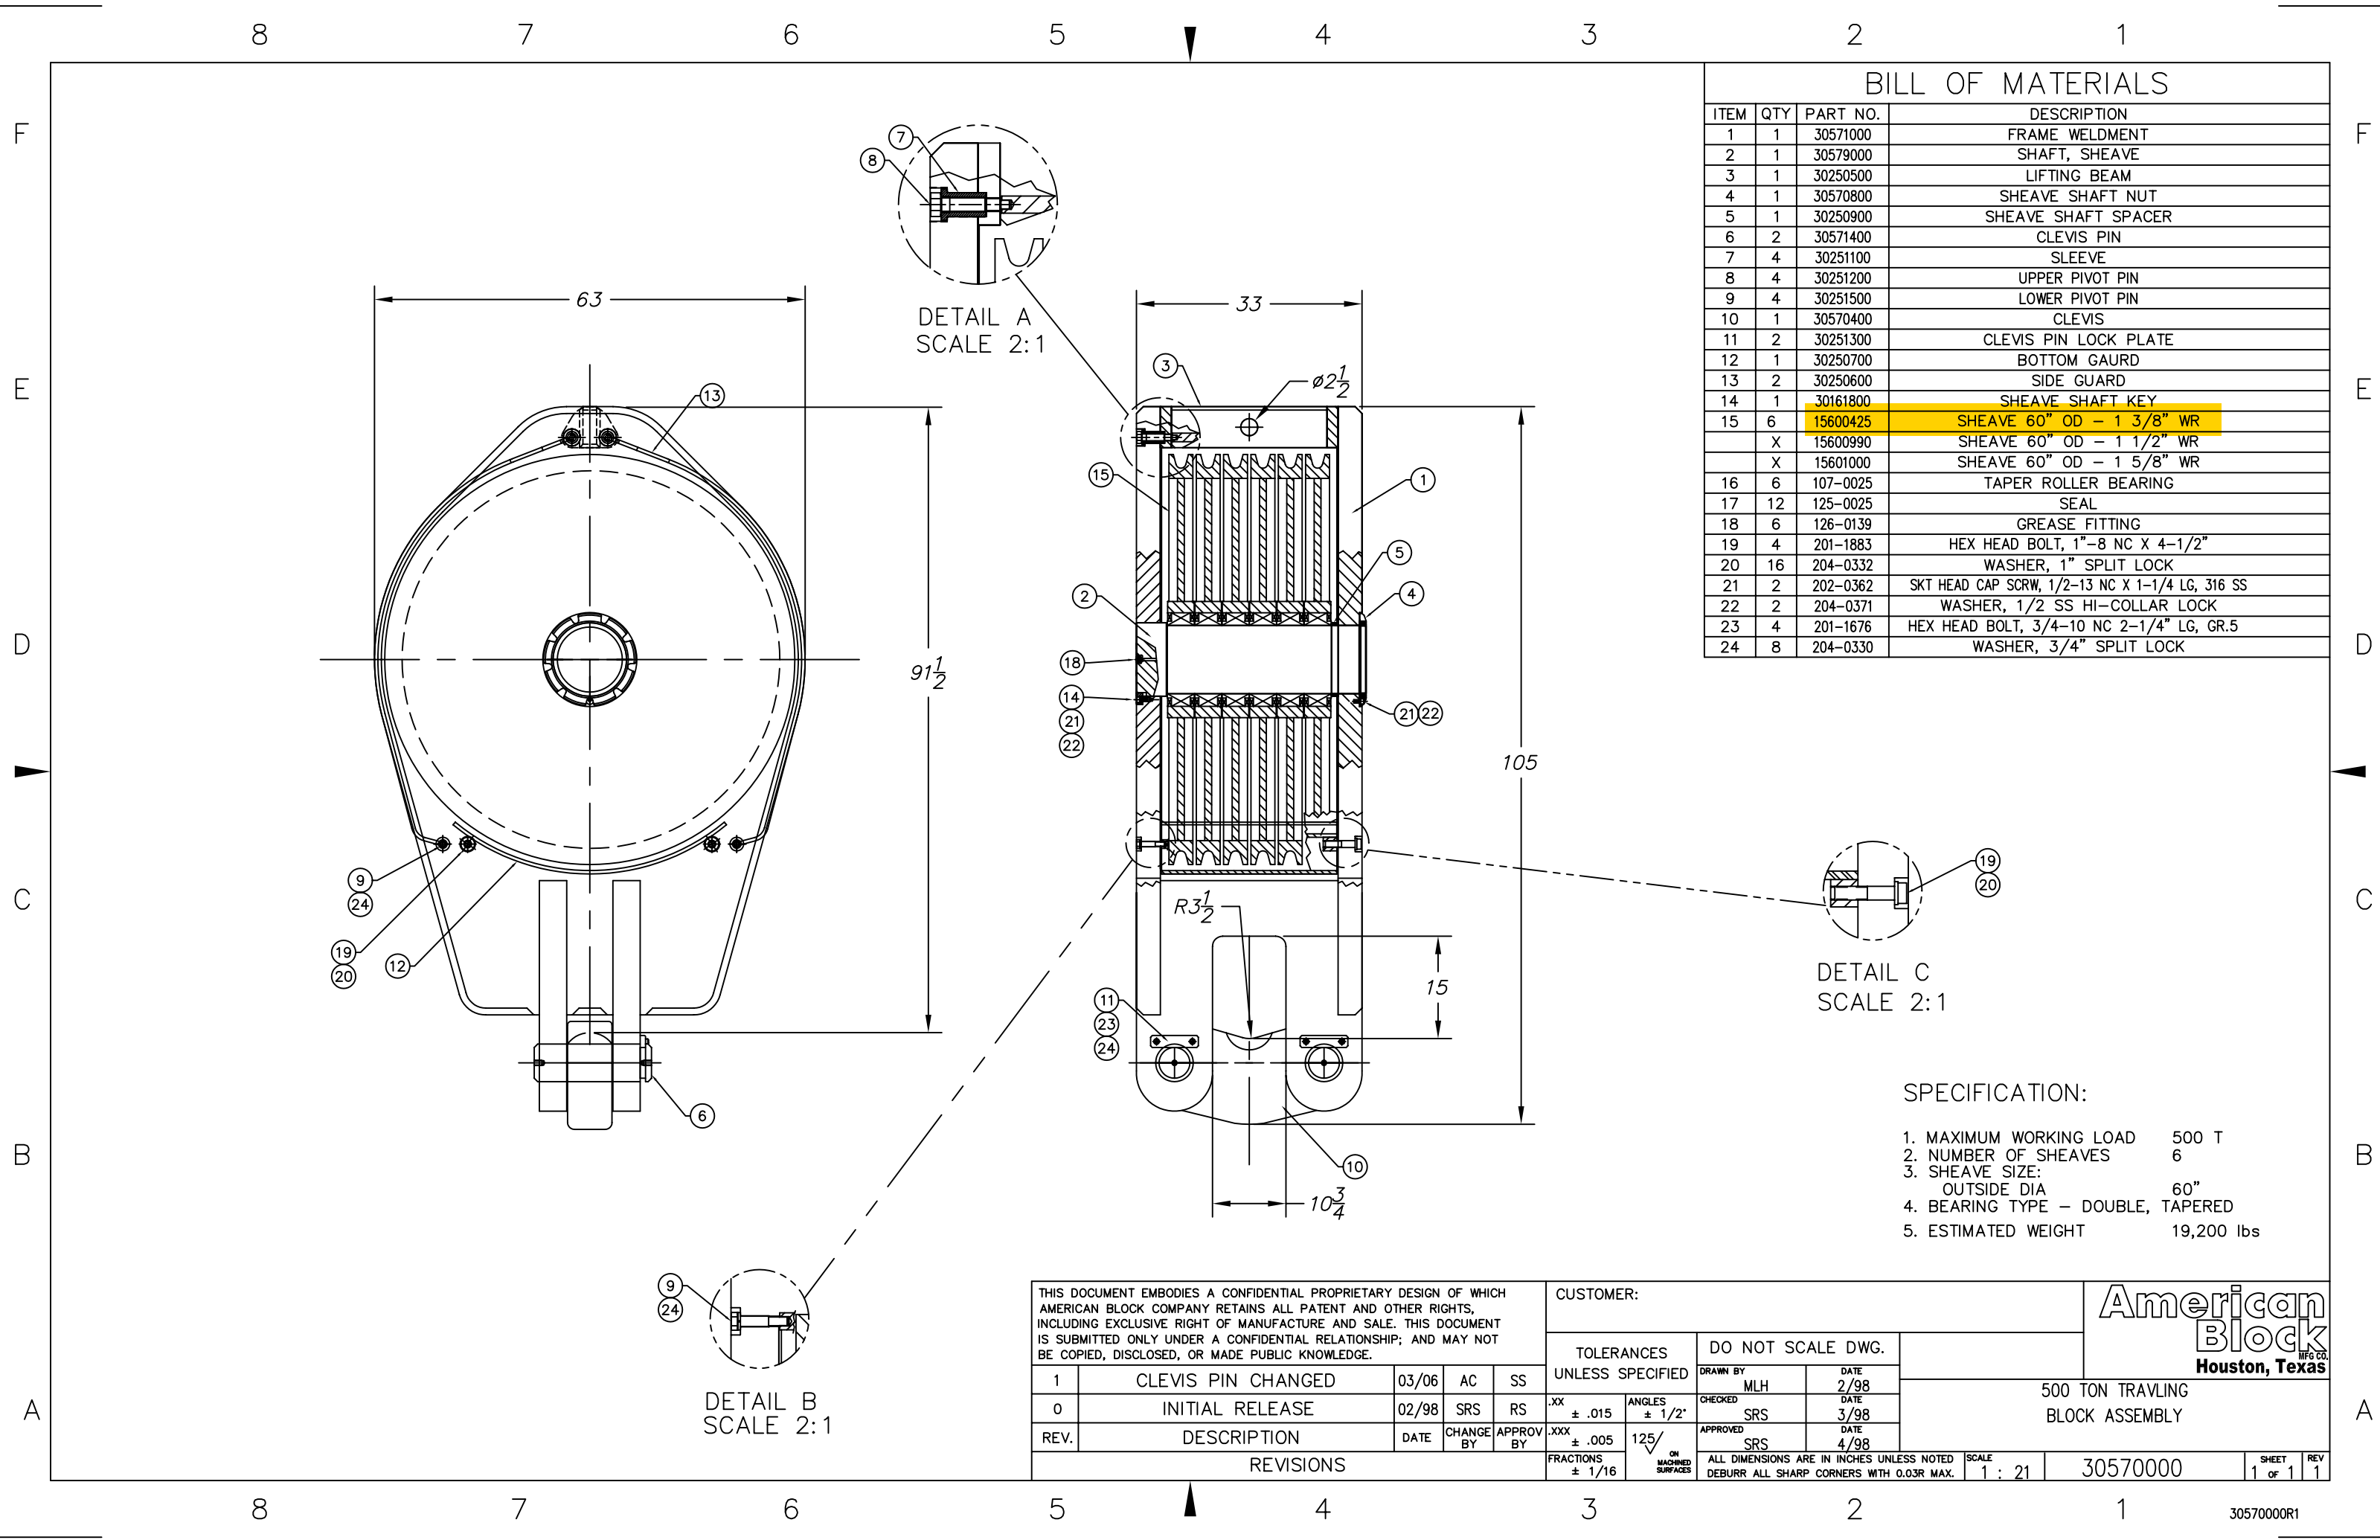

BILL OF MATERIALS

ITEM	QTY	PART NO.	DESCRIPTION
1	1	30571000	FRAME WELDMENT
2	1	30579000	SHAFT, SHEAVE
3	1	30250500	LIFTING BEAM
4	1	30570800	SHEAVE SHAFT NUT
5	1	30250900	SHEAVE SHAFT SPACER
6	2	30571400	CLEVIS PIN
7	4	30251100	SLEEVE
8	4	30251200	UPPER PIVOT PIN
9	4	30251500	LOWER PIVOT PIN
10	1	30570400	CLEVIS
11	2	30251300	CLEVIS PIN LOCK PLATE
12	1	30250700	BOTTOM GAURD
13	2	30250600	SIDE GUARD
14	1	30161800	SHEAVE SHAFT KEY
15	6	15600425	SHEAVE 60" OD - 1 3/8" WR
	X	15600990	SHEAVE 60" OD - 1 1/2" WR
	X	15601000	SHEAVE 60" OD - 1 5/8" WR
16	6	107-0025	TAPER ROLLER BEARING
17	12	125-0025	SEAL
18	6	126-0139	GREASE FITTING
19	4	201-1883	HEX HEAD BOLT, 1"-8 NC X 4-1/2"
20	16	204-0332	WASHER, 1" SPLIT LOCK
21	2	202-0362	SKT HEAD CAP SCRW, 1/2-13 NC X 1-1/4 LG, 316 SS
22	2	204-0371	WASHER, 1/2 SS HI-COLLAR LOCK
23	4	201-1676	HEX HEAD BOLT, 3/4-10 NC 2-1/4" LG, GR.5
24	8	204-0330	WASHER, 3/4" SPLIT LOCK

SPECIFICATION:

1. MAXIMUM WORKING LOAD500 T
2. NUMBER OF SHEAVES6
3. SHEAVE SIZE:

OUTSIDE DIA60"
4. BEARING TYPE - DOUBLE, TAPERED
5. ESTIMATED WEIGHT19,200 lbs

THIS DOCUMENT EMBODIES A CONFIDENTIAL PROPRIETARY DESIGN OF WHICH AMERICAN BLOCK COMPANY RETAINS ALL PATENT AND OTHER RIGHTS, INCLUDING EXCLUSIVE RIGHT OF MANUFACTURE AND SALE. THIS DOCUMENT IS SUBMITTED ONLY UNDER A CONFIDENTIAL RELATIONSHIP; AND MAY NOT BE COPIED, DISCLOSED, OR MADE PUBLIC KNOWLEDGE.

CUSTOMER:

1	CLEVIS PIN CHANGED	03/06	AC	SS
0	INITIAL RELEASE	02/98	SRS	RS
REV.	DESCRIPTION	DATE	CHANGE BY	APPROV BY

TOLERANCES
UNLESS SPECIFIED

DO NOT SCALE DWG.

DRAWN BY MLH	DATE 2/98
CHECKED SRS	DATE 3/98
APPROVED SRS	DATE 4/98

FRACTIONS
± 1/16

125/
ON
MACHINED
SURFACES

ALL DIMENSIONS ARE IN INCHES UNLESS NOTED
DEBURR ALL SHARP CORNERS WITH 0.03R MAX.

SCALE
1 : 21

American
Block
Houston, Texas

500 TON TRAVLING
BLOCK ASSEMBLY

30570000

SHEET
1 OF 1

30570000R1