


Customer Confirm

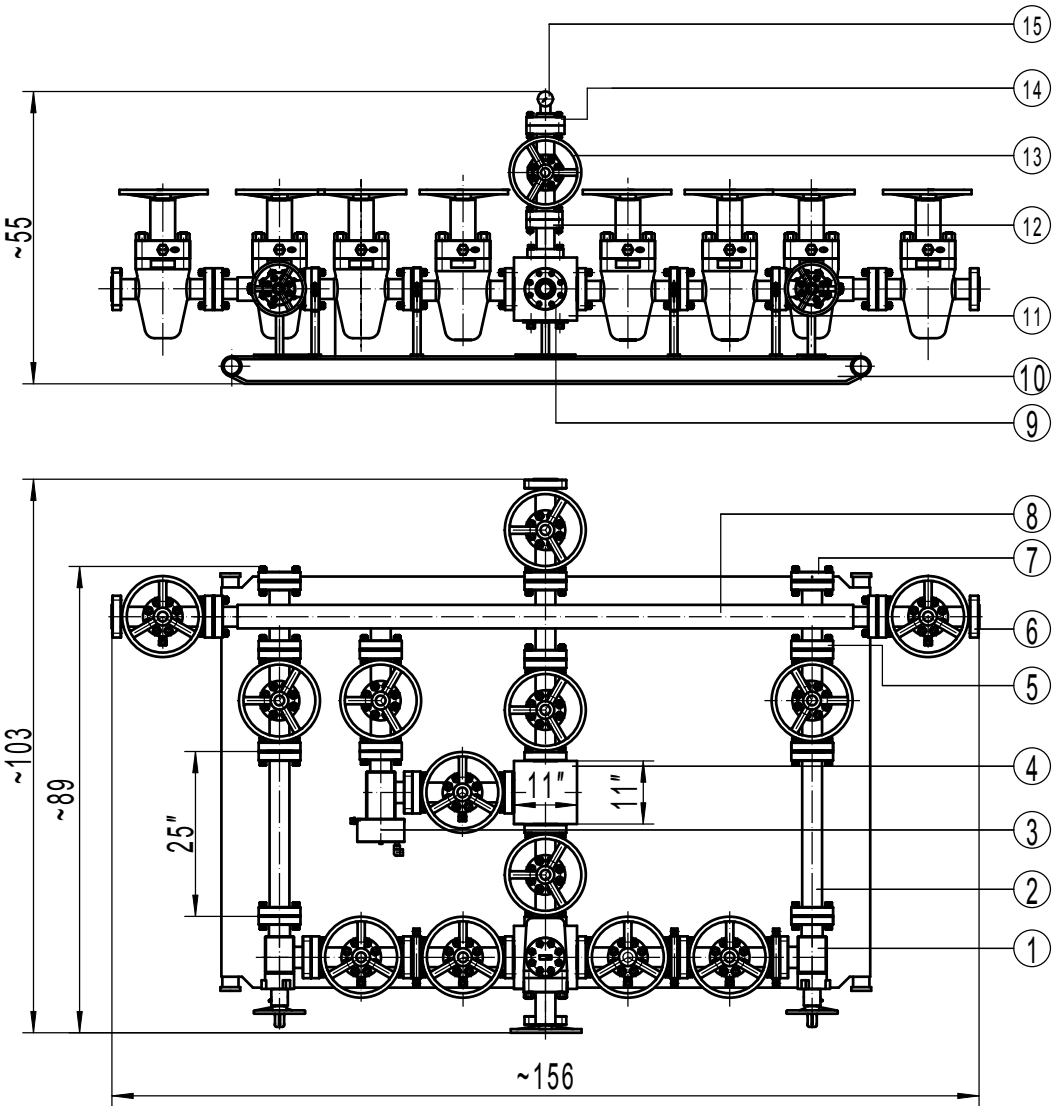


CHOKE MANIFOLD(3-1/8"5000PSI)

TECHNICAL PARAMETER

- 1.STANDARD:API 16C
- 2.PR: 1
- 3.PSL: 3
- 4.M.C: EE
- 5.T.C: PU
- 6.W.P.:5000PSI(35MPa)

15	PRESSURE GAUGE, 0-6000PSI W/2"LP	1	ASSY
14	FLANGE THREADED, 2-1/16"5000PSI×2"LP	1	4130
13	MANUAL GATE VALVE 2-1/16"5000PSI, FC	1	ASSY
12	SPOOL 2-1/16"5000PSI×2-1/16"5000PSI	1	4130
11	CROSS, (4) 3-1/8"5000PSI× (1) 2-1/16"5000PSI	1	4130
10	BEDFRAME	1	ASSY
9	SPOOL 3-1/8"5000PSI×3-1/8"5000PSI	1	ASSY
8	BUFFER TANK	1	4130
7	BLIND FLANGE 3-1/8"5000PSI	2	4130
6	MANUAL GATE VALVE 3-1/8"5000PSI, FC	13	ASSY
5	FLANGE WELD NECK 3-1/8"5000PSI	8	4130
4	TEE 3-1/8"5000PS	1	4130
3	HYDRAULIC DRILLING CHOKE 3-1/8"5000PSI	1	ASSY
2	SPOOL 3-1/8"5000PSI×3-1/8"5000PSI	2	4130
1	MANUAL DRILLING CHOKE 3-1/8"5000PSI	2	ASSY
ORDER	NAME	QTY	MATERIAL
DESIGN	JGH	APPROVE	ZDL
HONGZE DONGJUN MACHINERY CO.,LTD. TOPLAND OILFIELD SUPPLIES LTD.		DWG:	J2012-042-01

Customer Confirm

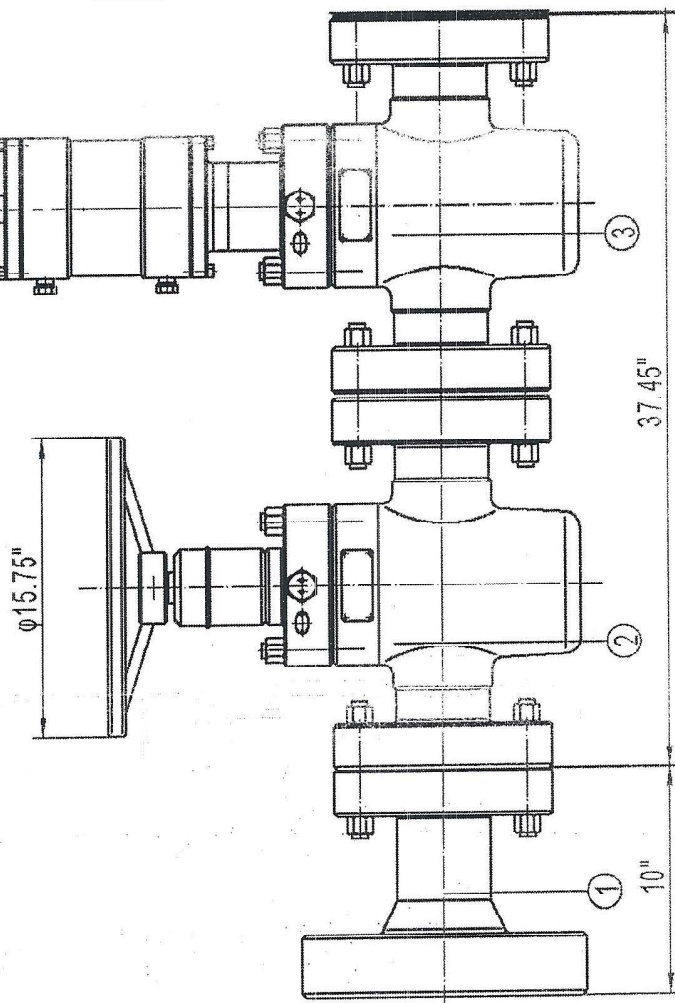

TECHNICAL PARAMETER

1. STANDARD: API 6A

2. PR: 1

3. PSL: 3

4. M.C: EE


5. T.C: U

6. W.P.: 5000PSI (35MPa)

CHOKE LINE (3-1/8" 5000PSI)

3	HYD GATE VALVE 3-1/8" 5000PSI, FC	1	ASSY
2	MANUAL GATE VALVE 3-1/8" 5000PSI, FC	1	ASSY
1	DSA, 3-1/8" 5000PSI x 4-1/16" 5000PSI	1	4130
ORDER	NAME	QTY	MATERIAL
DESIGN	APPROVE		
		DWG:	J2012-042-03

Customer Confirm

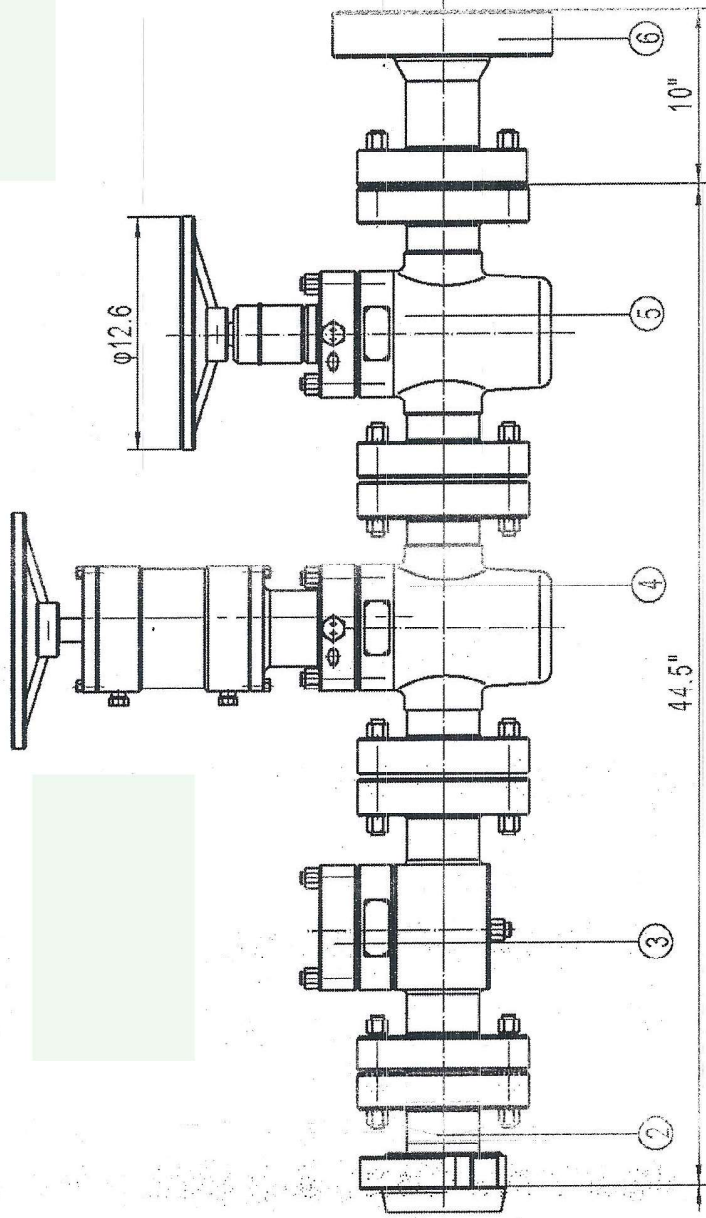

TECHNICAL PARAMETER

1. STANDARD: API 6A

2. PR: 1

3. PSL: 3

4. M. C: EE

5. T. C: U


6. W. P.: 5000PSI(35MPa)

KILL LINE(2-1/16"5000PSI)

6	DSA, 2-1/16"5000PSI x 4-1/16"5000PSI	1	4130
5	MANUAL GATE VALVE 2-1/16"5000PSI, FC	1	ASSY
4	HYD GATE VALVE 2-1/16"5000PSI, FC	1	ASSY
3	CHECK VALVE 2-1/16"5000PSI	1	ASSY
2	FLANGE UNION ADAPTER 2-1/16"5000PSI x 2"-1502FEMALE	1	4130

ORDER	NAME	QTY	MATERIAL
DESIGN	APPROVE		

DWG: J2012-04 2-02

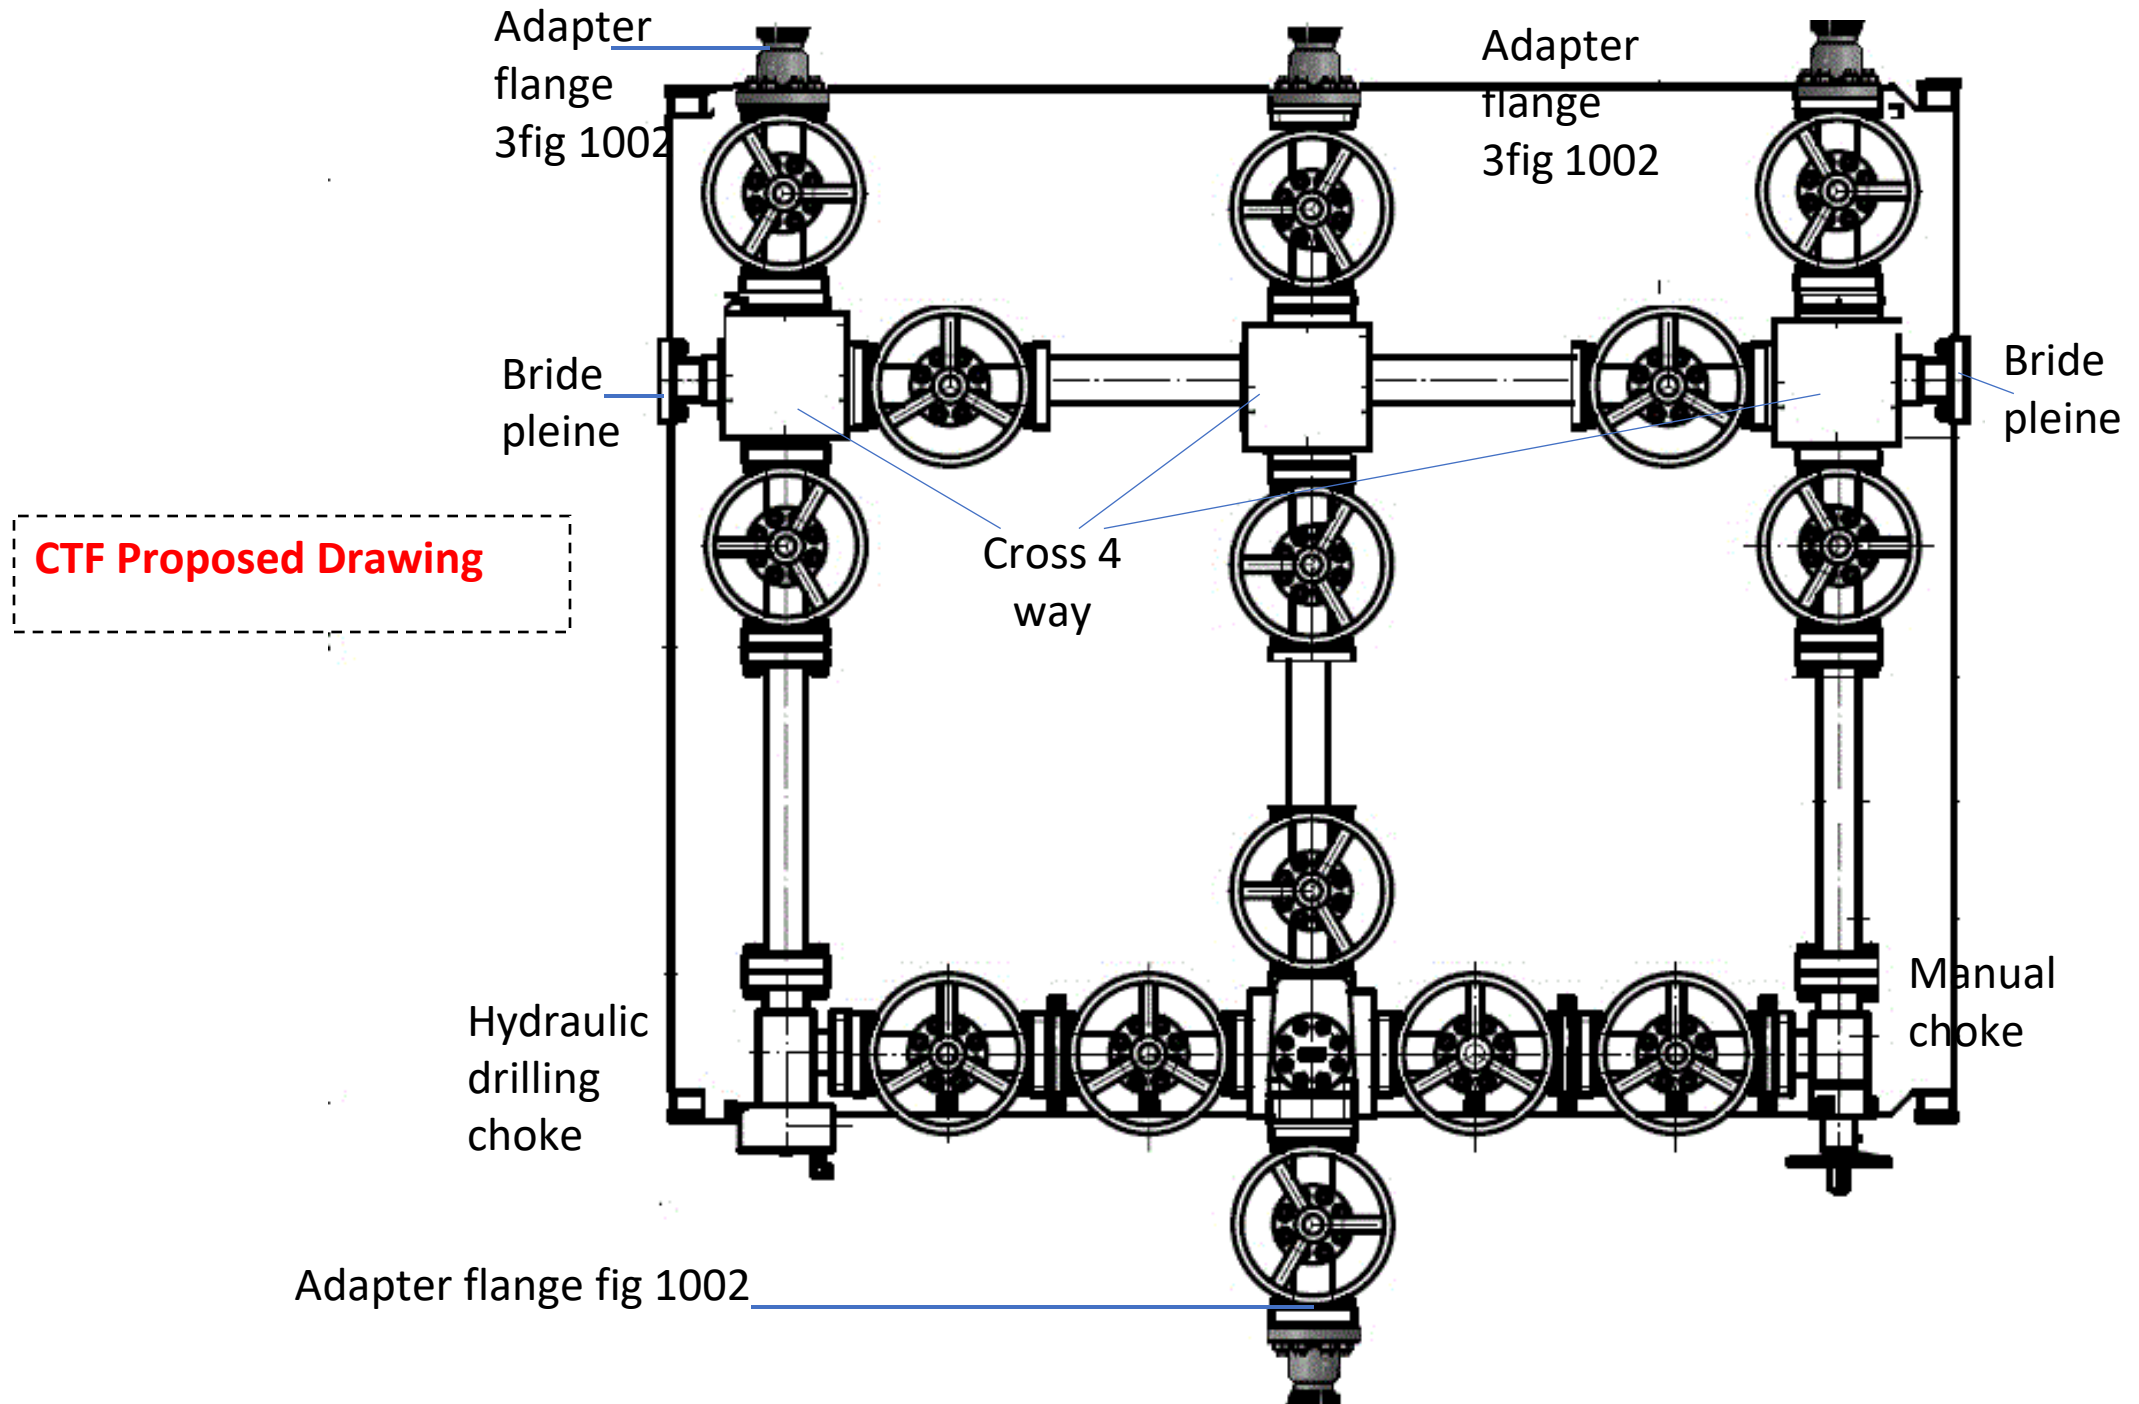

CTF Proposed Drawing