


2 HOLES 2-9/32" DIA. THRU BOTTOM
OF BASE FOR DOWEL LOCATION OF
ROTARY ON STRUCTURAL STEEL FRAME

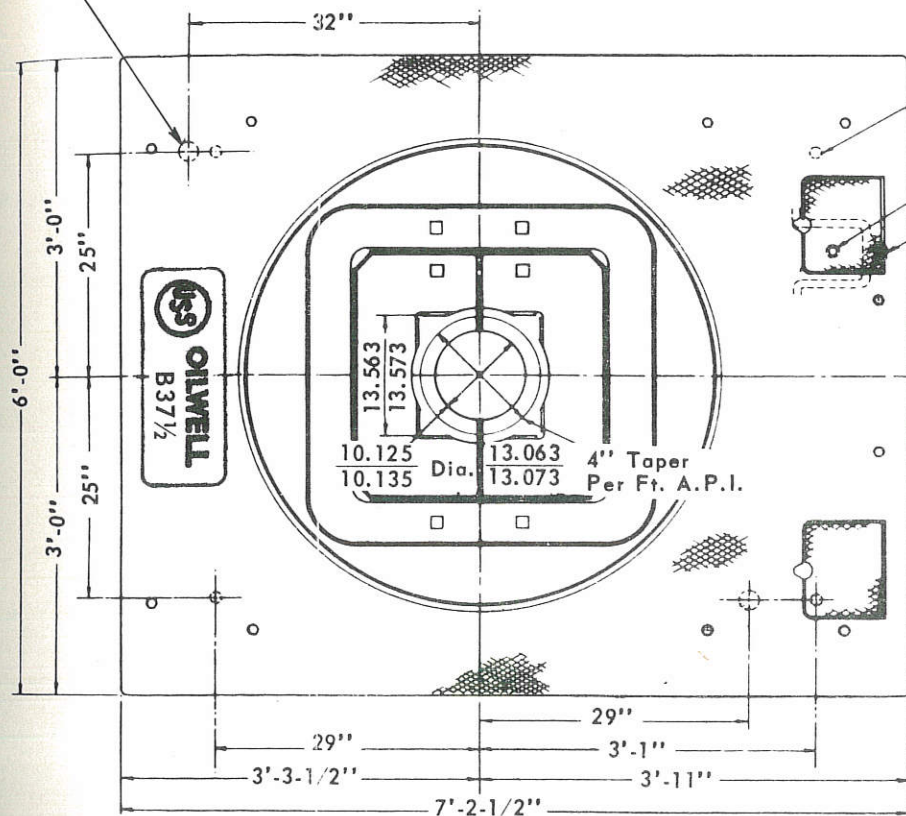

4 HOLES 1-3/8 DIA. THRU BOTTOM
OF BASE FOR BOLTING ROTARY
TO FRAME.

OIL LEVEL DIP STICK AND FILLER PIPE.

1-1/2 DRAIN PLUG

1.249" WIDE X 7/16" DEEP KEYWAY

4.9375" DIA.
4.9365" DIA.

7-3/4"

RATED DEAD LOAD CAPACITY	650	TONS MAX.
RECOMMENDED MAX. TABLE SPEED	350	R.P.M.
TURNTABLE OPENING	37-1/2	DIA.
PINION - RING GEAR SPEED RATIO	3.787:1	REDUCTION

